


Techlon India

Simplify Connecting to Smart manufacturing

P-22, 1st Floor, Sector 1 Bawana
Industrial area, New Delhi

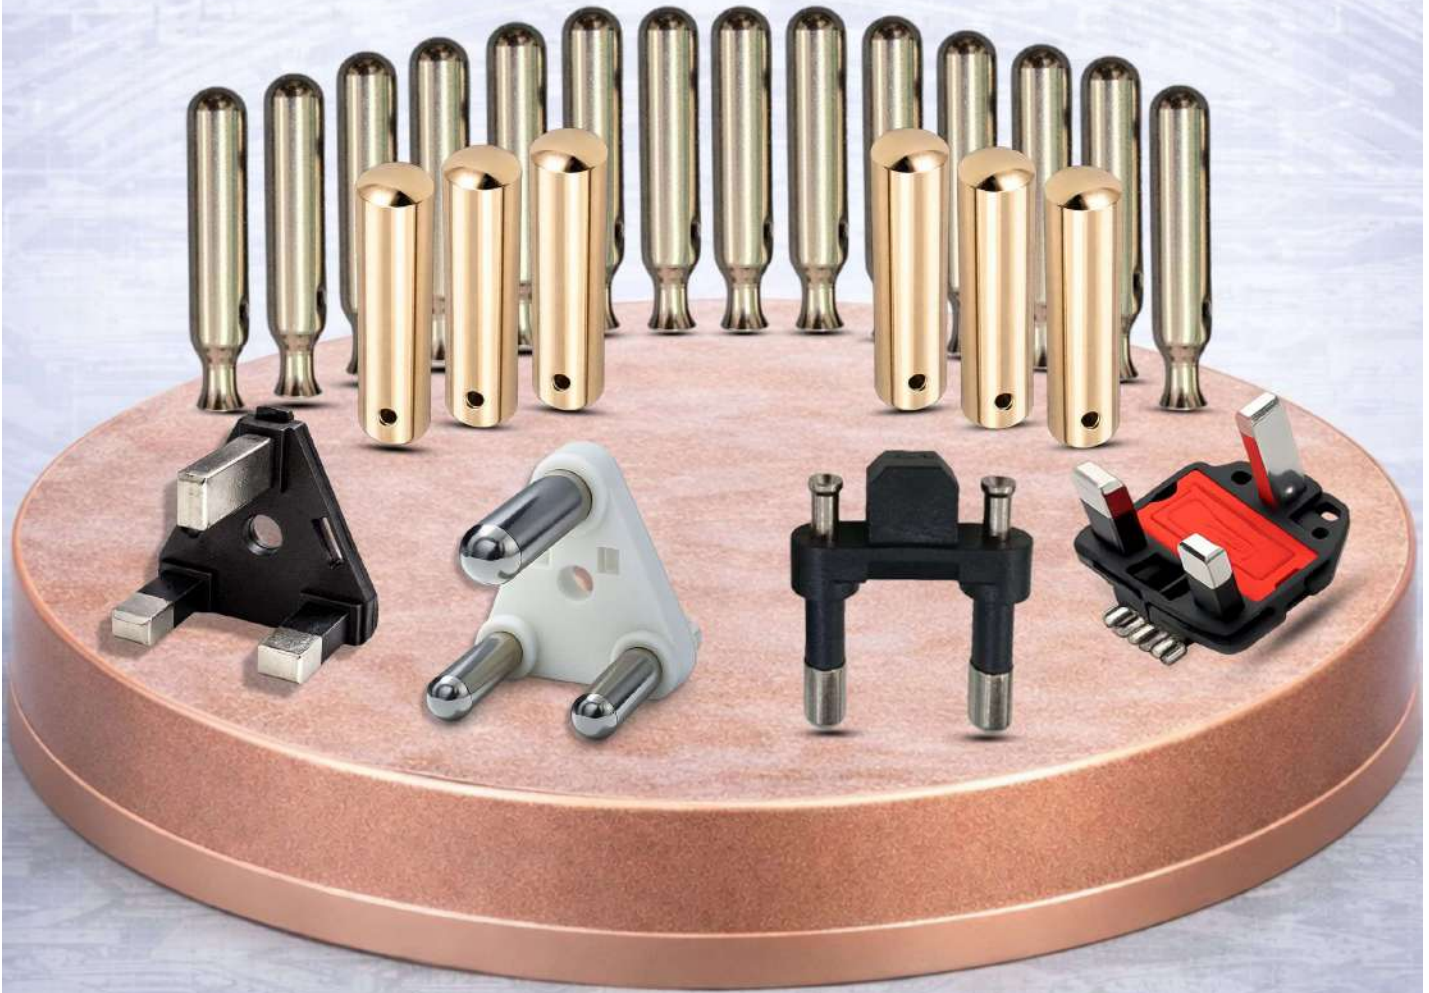

Techlon India offers precision-engineered brass plug inserts, high-conductivity brass hollow pins, and IEC Connectors, delivering reliable electrical Performance and long service life. Designed for safety, durability, and consistent quality-ideal for plugs, connectors, and power-cord applications.



info@techlonindia@gmail.com

| 9718051758

| www.techlon.in

6 AMP Hollow Pin Crimping Type



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050mm)
Length Pins (L)	27.20mm ± 0.1
Weight-GRM	0.80 - 0.85 Gram/PCS
Material	CuZn 63:37 Brass

10 AMP Hollow Pin Crimping Type



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	07.06mm (+0.025 - 0.050mm)
Length Pins (L)	32.4mm ± 0.10
Weight-GRM	1.40 - 1.50 Gram/PCS
Material	CuZn 63:37 Brass

6 AMP Solid Pin Crimping Type



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050mm)
Length Pins (L)	27.20mm ± 0.1
Weight - GRM	3.25 - 3.30 Gram Pcs
Material	cuZn 63:37 Brass

10 AMP Solid Pin Crimping Type



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	07.06mm (+0.025 - 0.050mm)
Length Pins (L)	32.40mm ± 0.05
Weight - GRM	7.932 - 7.98 Gram Pcs
Material	Brass Round Rod

16 AMP Hollow Pin Crimping Type



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	08.71mm (+0.025 - 0.050mm)
Length Pins (L)	41.50mm ± 0.20
Weight-GRM	1.40 - 1.50 Gram/PCS
Material	CuZn 63:37 Brass

16 AMP Solid Pin Crimping Type



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	08.71mm (+0.025 - 0.050mm)
Length Pins (L)	39.80mm ± 0.1
Weight - GRM	15.74 - 15.79 Gram Pcs
Material	Brass

Ti-5023 6AMP Hollow Pin Solder Type



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050mm)
Length Pins (L)	24.00mm ± 0.1
Weight - GRM	0.60 - 0.65 / Per Pcs
Material	cuZn 63:37 Brass

Ti-5023 16AMP Hollow Pin Solder Type



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	8.75mm (+0.02)
Length Pins (L)	35.50mm ± 0.10
Weight - GRM	1.00 - 1.05 / Per Pcs
Material	cuZn 63:37 Brass Strips

2.5 AMP Sleeve Type Hollow Bell Mouth Pin



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050mm)
Length Pins (L)	28.15mm ± 0.15
Weight - GRM	2.30 - 2.35 / Per Pcs
Material	Brass Round Rod

2.5 AMP Sleeve Solid Brass Pin With Bell Mouth



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 



Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050mm)
Length Pins (L)	28.15mm ± 0.15
Weight - GRM	2.30 - 2.35 / Per Pcs
Material	Brass Round Rod

2.5 AMP Mobile Charger Pin



Premium Features

- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050) Hollow Crimping
Length Pins (L)	34.90mm
Weight - GRM	0.325 to 350 Gram / Gross
Material	CuZn 65:35 Brass

2.5 AMP Sleeve Hollow Brass Pin With Bell Mouth



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	04.97mm
Length Pins (L)	28.00mm ± 0.20
Weight-GRM	0.73 - 0.83 Gram/PCS
Material	CuZn 63:37 Brass

3 Pin 6AMP Brass Plug Insert Solid Crimping



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 5/6/10A, 250V

Technical Details

Pin Diameter	Live & Neutral 05.04mm, Solid Crimping
Length Pins (L)	L/N 27mm + 0.1, Earth 32mm ± 0.1
Earth Pin	07.03mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade II Brass

3 Pin 6AMP Brass Plug Insert Hollow Crimping



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 5/6/10A, 250V

Technical Details

Pin Diameter	Live & Neutral 05.04mm, Hollow Crimping
Length Pins (L)	L/N 27mm + 0.1, Earth 32mm ± 0.1
Earth Pin	07.03mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade II Brass

3 Pin 16AMP Brass Plug Insert Hollow Crimping



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 15/16A, 250V

Technical Details

Pin Diameter	Live & Neutral 07.04mm, Hollow Crimping
Length Pins (L)	L/N 32mm + 0.1, Earth 40mm ± 0.1
Earth Pin	08.70mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade II Brass

3 Pin 16AMP Brass Plug Insert Solid Crimping



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 15/16A, 250V

Technical Details

Pin Diameter	Live & Neutral 07.04mm, Solid Crimping
Length Pins (L)	L/N 32mm + 0.1, Earth 40mm ± 0.1
Earth Pin	08.70mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade II Brass

Two Pin Full Brass Solid Plug Insert 19.10 Dist 5.04mm



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050) Solid Crimping
Length Pins (L)	27.00mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade - II Brass

Two Pin Full Brass Hollow Plug Insert 19.10 Dist 5.04mm



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050) Solid Crimping
Length Pins (L)	27.00mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: cuZn 65:35 Brass

Two Pin Brass Plug Insert Solid Dist. 19.10mm Bis Standard



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	Two Pins: 05.04mm, Solid Crimping
Length Pins (L)	Two Pins - 28.00mm
Centre Distance	19.10mm
Material	Resin PBT Glass Filled IS Grade-II

Two Pin Brass Plug Insert Hollow Dist.19.10mm BIS Standard



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	Two Pins: 05.04mm, Hollow Out
Length Pins (L)	Two Pins - 28.00mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: IS Grade - II

UK Insert (ZN) With Fuse



Premium Features

- ✓ Nickel Plated Brass Pins
- ✓ BS Standard
- ✓ ROHS Compliant 
- ✓ Earth 27.20mm ±0.1

Technical Details

Pin Size	Live & Neutral 4.00mm x 8.00mm, Solid Crimping
Length pin (L)	L & N 24mm ±0.1
Earth Pin	3.98mm X 7.98mm,
Material	Resin: PBT 30% Glass Filled

Three Pin 13AMP UK Type Flat Insert



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ Earth 27.20mm±0.1

Technical Details

Pin Diameter	Live & Neutral 3.94mm X 6.33mm, Solid Crimping
Length Pins (L)	L & N 24mm ±0.1
Earth Pin	4.00mm x 8.00mm, Solid Crimping
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade III Brass

C-7 Connector With Terminal



Premium Features

- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Brass	cuZn 65:35 brass
Plastic Resin	PBT 30% GF UL94
Curent/Voltage	10A, 250V
Usage connector	Plugs, Connectors, Power Cords, Outler Strips, Sockets, Inlets, Plug Adapters

3 Pin 13AMP UK Type Flat Insert



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ Earth 36mm ±0.1

Technical Details

Pin Size	Live & Neutral 3.94mm X 6.33mm, Solid Crimping
Length Pins (L)	L & N 31mm ±0.1
Earth Pin	3.98mm X 7.98mm, Solid Crimping
Material	Resin: PBT Glass Filled Brass: IS 319 Grade-II

Schuko Insert

Strong | Safe | Reliable



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A / 250V



Technical Details

Pin Diameter	04.80mm, Solid Crimping
Length Pins (L)	31mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade III Brass

15 Amp Nema Plug Insert 5-15p



Premium Features

- ✓ Round Pin
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Pin Diameter	Live & Neutral/6.25X1.47mm (Flat Pin)
Length Pins (L)	L/N 27.75mm + 0.1
Earth	4.80mm
Material	Brass: L/N: CUZN37 (63:37) Earth : CUZN39PB3 IS 319 Grade-II Resin PBT FR 30%GF

Two Pin Hook Solid - 4.80mm DIA



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ European Standard
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	04.80mm, Solid Crimping
Length Pins (L)	31mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade - II

Two Pin Hook Hollow



Premium Features

- ✓ Hollow Crimping
- ✓ Nickel Plated Brass Pins
- ✓ European Standard
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	04.80mm, Hollow Crimping
Length Pins (L)	31mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade - II

Two Pin Brass Insert Solid 16.50 Dist.Dia 5.00mm White



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	Two Pins: 05.04mm, Solid Crimping
Length Pins (L)	Two Pins - 28.00
Centre Distance	16.50mm
Material	Resin (PBT) and Glass Filled Brass: IS Grade - II

Two Pin Brass Hook Solid Pin Insert - Black



Premium Features

- ✓ Solid Crimping
- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 
- ✓ 6A, 250V

Technical Details

Pin Diameter	05.08mm (+0.025 - 0.050) Solid Crimping
Length Pins (L)	27.00mm
Centre Distance	19.10mm
Material	Resin (PBT) and Glass Filled Brass: IS 319 Grade - II

C-14 Connector With Terminal



Premium Features

- ✓ Nickel Plated Brass Pins
- ✓ ISI Standard 
- ✓ ROHS Compliant 

Technical Details

Brass	cuZn 65:35 brass
Plastic Resin	Nylon PA6 GF33 Fr V0 UL94
Current/Voltage	10A,250V
Usage connector	Plugs, Connectors, Power Cords, Outlet Strips, Sockets, Inlets, Plug Adapters